


# Datasheet

## Top Sand®

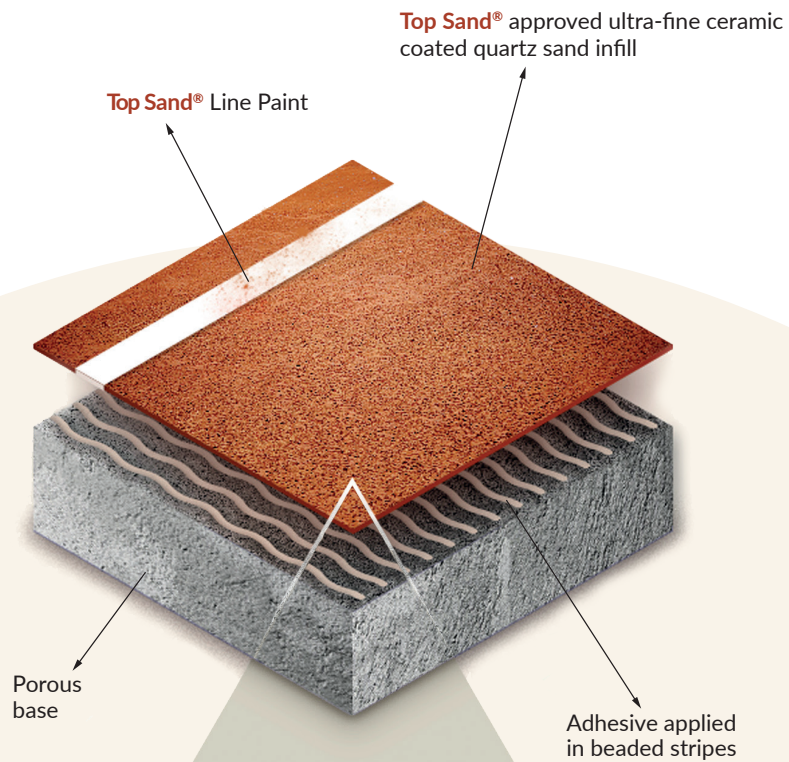

Top Sand® Membrane

A circular inset provides a close-up view of the Top Sand® Membrane, showing a dense, textured surface composed of numerous small, reddish-brown fibers or granules.

Not to scale

# Datasheet

|                      |  |
|----------------------|--|
| Description          | Needle punch tennis surface.<br>Membrane composed of 100% structured polypropylene fibre infilled with coloured ultra fine ceramic quartz sand.  |
| Destination          | Outdoor and Indoor tennis courts.  |
| Support layer        | Hot rolled impermeable asphalt 0/4-0/6 with cross-slope. Porous concrete.<br>Porous asphalt. Base horizontal plane must be checked before starting installation.<br>Deviations of 6 mm under a 3- meter rule will be tolerated. Outside this limit the base must be levelled using an appropriate and approved technical solution. |
| Color                | Red<br>Green   |
| Membrane Mass        | 1.550 g/m <sup>2</sup> ± 10 %  |
| Membrane Thickness   | 10 mm ± 10 %   |
| Standard roll Width  | 2 m  |
| Standard roll Length | 36,20 m  |
| Standard roll Weight | approx. 112 kg   |
| Fire Rating          | Bfl s1   |
| Court markings       | Line Paint and Finisher, approx. 65 Kg per court.  |
| Infill               | Ultra-fine ceramic quartz sand supplied or authorized by Viganò Pavitex.<br>Red or green. Standard quantity: 7 k./m <sup>2</sup>   |
| Adhesive             | Two-component PU glue in stripes approx. 750 g/m <sup>2</sup>  |
| Playing features     | ITF Category 2 «Medium-Slow».  |
| Warranty             | 7 years Degressive Warranty (see warranty conditions, available upon request)  |
| Maintenance          | See <b>Top Sand</b> <sup>®</sup> Maintenance Guidelines.   |
| Installation         | See <b>Top Sand</b> <sup>®</sup> Installation Guidelines.  |
| Certification        | ISO 9001:2015. Certificate Number: IT 240282   |



***We reserve the right to amend these specifications***